


1. Mechanically clean with abrasive drums in die grinder
2. Trim clean fork blade tip to 13.70mm plus until light fit
3. Flux and fit and rotate to correct alignment with fork blade oval
4. Braze, use silver with stainless steel

Dropouts are available in normal and stainless steel
Dropouts are available with Plain wheel bite facets
or with LLEWELLYN text

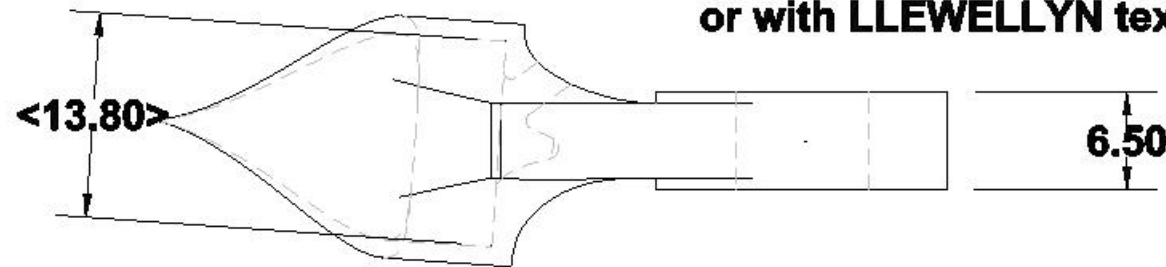

LLEWELLYN CUSTOM BICYCLES

LFD Dropout data sheet

Drawn by Darrell L McCulloch

Date 17/2/2012